


PL V 10W BYP TITANIUM LED SERIES



PL:EDGE
SERIES

10W REPLACES



**26W
CFL**

60% Energy Savings

PRO



- ⌚ Built-in universal voltage driver - Bypass installation
- ⌚ Compatible with G24d, GX24d, G24q & GX24q bases
- ⌚ Innovative round design
- ⌚ Exceptional efficacy 102 LPW
- ⌚ Available in 2700K, 3000K, 3500K & 4000K CCT

50,000 H

120-277V
UNIVERSAL

102
LPW
EFFICACY

5
YR
WARRANTY

82
CRI (Ra)


SEMI
DIRECTIONAL



PL PRODUCT FEATURES

BYPass Installation

This PL V lamp is not compatible with magnetic or electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

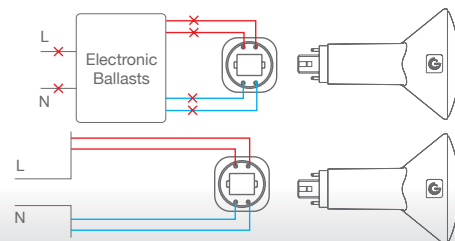

DESIGNED FOR VERTICAL APPLICATIONS



PL V 10W BYP TITANIUM LED SERIES

APPLICATIONS

Retail




Hospitality



Office



| | |
|-------------------------------------|---|
| Base: | G24d, GX24d, G24q & GX24q (2/4-pin CFL) |
| Voltage: | 120-277V |
| Dimmable: | No |
| PF: | 0.9 |
| Lifetime (L70): | 50,000 hrs |
| Weight: | 0.21lb / 95g |
| Min. compartment dimensions: | 6-1/2" (DIA)x 8-3/4"(H) |

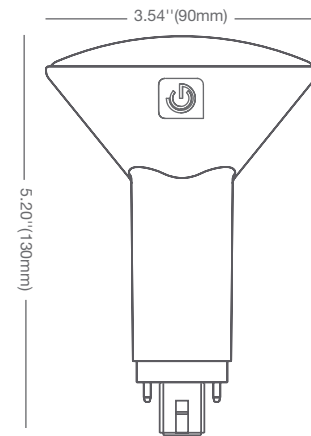

SPECIFICATIONS

| Model | Product | Power (W) | CCT | CRI (typ.) | Lumens | LPW | Beam Angle |
|---------------|---------|-----------|---------------------|------------|--------|-----|------------|
| 10PLV/827/BYP | 28362 | 10 | Soft White 2700K | 82 | 950 | 95 | 120° |
| 10PLV/830/BYP | 28363 | 10 | Warm White 3000K | 82 | 1000 | 100 | 120° |
| 10PLV/835/BYP | 28364 | 10 | Neutral White 3500K | 82 | 1000 | 100 | 120° |
| 10PLV/840/BYP | 28365 | 10 | Cool White 4000K | 82 | 1020 | 102 | 120° |

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website