

# A19 9W DIM. TITANIUM LED SERIES



PRO



- ⌚ Exceptional efficacy 89 LPW in Soft White
- ⌚ 40% more energy savings than CFL
- ⌚ Comfortable warm diffused light
- ⌚ Natural A-lamp shape fits all applications
- ⌚ Ideal for lamps with shades
- ⌚ Suitable for use in totally enclosed fixtures



9W REPLACES



60W Inc.

80% Energy Savings


\$151 Savings per lamp\*



25,000 H



DIMMABLE



89 LPW EFFICACY



3 YR WARRANTY



82 CRI (Ra)



ENCLOSED\*\*


## A19 PRODUCT FEATURES

### Suitable for Enclosed Fixtures

This A19 is suitable for use in totally enclosed fixtures and capable of operating in a broad range of applications. Whether it is installed in fully enclosed flushmounts or sconces, this lamp's advanced thermal design ensures optimal performance over the course of its lifetime.



### Exceptional Efficacy

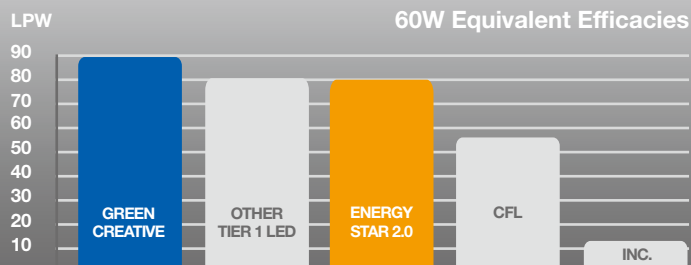

At 89 LPW, this lamp's efficacy is higher than the Tier 1 LED A19 60W replacement industry average and exceeds new ENERGY STAR 2.0 requirements. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

# A19 9W DIM. TITANIUM LED SERIES

## APPLICATIONS

### General Lighting



### Downlighting



### Uplighting



Ref:#DS170-A19-9W-230217

## SPECIFICATIONS

| Product Model               | 97780<br>9A19DIM/827   | 97781<br>9A19DIM/830   | 97782<br>9A19DIM/840   |
|-----------------------------|------------------------|------------------------|------------------------|
| Type                        | A19                    | A19                    | A19                    |
| Base                        | E26                    | E26                    | E26                    |
| Power (W)                   | 9                      | 9                      | 9                      |
| Voltage - Frequency         | 120V 60Hz              | 120V 60Hz              | 120V 60Hz              |
| Color Temp. (ANSI)          | Soft White 2700K       | Warm White 3000K       | Cool White 4000K       |
| CRI (Ra) (typ.)             | 82                     | 82                     | 82                     |
| Typical lumens (lm)         | 800                    | 820                    | 860                    |
| Efficacy (LPW)              | 89                     | 91                     | 96                     |
| Beam Angle                  | 240°                   | 240°                   | 240°                   |
| Dimmable                    | Yes**                  | Yes**                  | Yes**                  |
| Power Factor                | 0.9                    | 0.9                    | 0.9                    |
| Rated Lifetime - L70 (hrs.) | 25,000                 | 25,000                 | 25,000                 |
| Dia. x MOL                  | 2.36"x4.41" (60x112mm) | 2.36"x4.41" (60x112mm) | 2.36"x4.41" (60x112mm) |
| Weight (lb. / g)            | 0.10lb. / 45g          | 0.10lb. / 45g          | 0.10lb. / 45g          |

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$16 LED with 25,000-hr lifetime

\*\* Suitable for use in totally enclosed fixtures

\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water